

ANURAG KUMAR • D. MANJUNATH • JOY KURI

# W I R E L E S S N E T W O R K I N G



# **WIRELESS NETWORKING**

## The Morgan Kaufmann Series in Networking

Series Editor, David Clark, M.I.T.

*Wireless Networking*

Anurag Kumar, D. Manjunath, and Joy Kuri

*Bluetooth Application Programming with the Java APIs, Essentials Edition*

Timothy J. Thompson, Paul J. Kline, and C. Bala Kumar

*Internet Multimedia Communications Using SIP*  
Rogelio Martinez Perea

*Information Assurance: Dependability and Security in Networked Systems*

Yi Qian, James Joshi, David Tipper, and Prashant Krishnamurthy

*Network Simulation Experiments Manual, 2e*  
Emad Aboelela

*Network Analysis, Architecture, and Design, 3e*  
James D. McCabe

*Wireless Communications & Networking: An Introduction*

Vijay K. Garg

*Ethernet Networking for the Small Office and Professional Home Office*

Jan L. Harrington

*IPv6 Advanced Protocols Implementation*  
Qing Li, Tatuya Jinmei, and Keiichi Shima

*Computer Networks: A Systems Approach, 4e*  
Larry L. Peterson and Bruce S. Davie

*Network Routing: Algorithms, Protocols, and Architectures*  
Deepankar Medhi and Karthikeyan Ramaswami

*Deploying IP and MPLS QoS for Multiservice Networks: Theory and Practice*  
John Evans and Clarence Filsfil

*Traffic Engineering and QoS Optimization of Integrated Voice & Data Networks*  
Gerald R. Ash

*IPv6 Core Protocols Implementation*  
Qing Li, Tatuya Jinmei, and Keiichi Shima

*Smart Phone and Next-Generation Mobile Computing*

Pei Zheng and Lionel Ni

*GMPLS: Architecture and Applications*

Adrian Farrel and Igor Bryskin

*Network Security: A Practical Approach*

Jan L. Harrington

*Content Networking: Architecture, Protocols, and Practice*

Markus Hofmann and Leland R. Beaumont

*Network Algorithmics: An Interdisciplinary Approach to Designing Fast Networked Devices*  
George Varghese

*Network Recovery: Protection and Restoration of Optical, SONET-SDH, IP, and MPLS*  
Jean Philippe Vasseur, Mario Pickavet, and Piet Demeester

*Routing, Flow, and Capacity Design in Communication and Computer Networks*  
Michal Pióro and Deepankar Medhi

*Wireless Sensor Networks: An Information Processing Approach*  
Feng Zhao and Leonidas Guibas

*Communication Networking: An Analytical Approach*

Anurag Kumar, D. Manjunath, and Joy Kuri

*The Internet and Its Protocols: A Comparative Approach*  
Adrian Farrel

*Modern Cable Television Technology: Video, Voice, and Data Communications, 2e*  
Walter Ciciora, James Farmer, David Large, and Michael Adams

*Bluetooth Application Programming with the Java APIs*

C. Bala Kumar, Paul J. Kline, and Timothy J. Thompson

*Policy-Based Network Management: Solutions for the Next Generation*  
John Strassner

*MPLS Network Management: MIBs, Tools, and Techniques*

Thomas D. Nadeau

*Developing IP-Based Services: Solutions for Service Providers and Vendors*  
Monique Morrow and Kateel Vijayananda

*Telecommunications Law in the Internet Age*  
Sharon K. Black

*Optical Networks: A Practical Perspective, 2e*  
Rajiv Ramaswami and Kumar N. Sivarajan

*Internet QoS: Architectures and Mechanisms*  
Zheng Wang

*TCP/IP Sockets in Java: Practical Guide for Programmers*  
Michael J. Donahoo and Kenneth L. Calvert

*TCP/IP Sockets in C: Practical Guide for Programmers*  
Kenneth L. Calvert and Michael J. Donahoo

*Multicast Communication: Protocols, Programming, and Applications*  
Ralph Wittmann and Martina Zitterbart

*MPLS: Technology and Applications*  
Bruce Davie and Yakov Rekhter

*High-Performance Communication Networks, 2e*  
Jean Walrand and Pravin Varaiya

*Internetworking Multimedia*  
Jon Crowcroft, Mark Handley, and Ian Wakeman

*Understanding Networked Applications: A First Course*  
David G. Messerschmitt

*Integrated Management of Networked Systems: Concepts, Architectures, and Their Operational Application*  
Heinz-Gerd Hegering, Sebastian Abeck, and Bernhard Neumair

*Virtual Private Networks: Making the Right Connection*  
Dennis Fowler

*Networked Applications: A Guide to the New Computing Infrastructure*  
David G. Messerschmitt

*Wide Area Network Design: Concepts and Tools for Optimization*  
Robert S. Cahn

*For further information on these books and for a list of forthcoming titles, please visit our website at <http://www.mkp.com>*



# WIRELESS NETWORKING

**Anurag Kumar**

**D. Manjunath**

**Joy Kuri**



AMSTERDAM • BOSTON • HEIDELBERG • LONDON  
NEW YORK • OXFORD • PARIS • SAN DIEGO  
SAN FRANCISCO • SINGAPORE • SYDNEY • TOKYO

Morgan Kaufmann Publishers is an imprint of Elsevier



MORGAN KAUFMANN PUBLISHERS

*Senior Acquisitions Editor* Rick Adams  
*Publishing Services Manager* George Morrison  
*Project Manager* Karthikeyan Murthy  
*Assistant Editor* Gregory Chalson  
*Design Direction* Alisa Andreola  
*Cover Designer* Dick Hannus  
*Cover Images* gettyimages.com/John Foxx  
istock.com/Jan Rysavy  
*Interior Printer* Sheridan Books  
*Cover Printer* Phoenix

Morgan Kaufmann Publishers is an imprint of Elsevier.  
30 Corporate Drive, Suite 400, Burlington, MA 01803, USA

This book is printed on acid-free paper. ☺

Copyright © 2008, Anurag Kumar, D. Manjunath and Joy Kuri. Published by Elsevier Inc. All rights reserved.

The right of author names to be identified as the authors of this work have been asserted in accordance with the copyright, Designs and Patents Act 1988.

Designations used by companies to distinguish their products are often claimed as trademarks or registered trademarks. In all instances in which Morgan Kaufmann Publishers is aware of a claim, the product names appear in initial capital or all capital letters. Readers, however, should contact the appropriate companies for more complete information regarding trademarks and registration.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form or by any means—electronic, mechanical, photocopying, scanning, or otherwise—without prior written permission of the publisher.

Permissions may be sought directly from Elsevier's Science & Technology Rights Department in Oxford, UK: phone: (+44) 1865 843830, fax: (+44) 1865 853333, E-mail: [permissions@elsevier.com](mailto:permissions@elsevier.com). You may also complete your request online via the Elsevier homepage (<http://elsevier.com>), by selecting "Support & Contact" then "Copyright and Permission" and then "Obtaining Permissions."

#### Library of Congress Cataloging-in-Publication Data

Kumar, Anurag.

Wireless networking / Anurag Kumar, D. Manjunath, Joy Kuri.

p. cm. – (The Morgan Kaufmann series in networking)

Includes bibliographical references.

ISBN 0-12-374254-4

1. Wireless LANs. 2. Wireless communication systems. 3. Sensor networks. I. Manjunath, D.

II. Kuri, Joy. III. Title.

TK5105.78.K86 2008

621.384–dc22

2007053011

#### British Library Cataloguing in Publication Data

A catalogue record for this book is available from the British Library

ISBN: 978-0-12-374254-4

For information on all Morgan Kaufmann publications,  
visit our website at [www.mkp.com](http://www.mkp.com) or [www.books.elsevier.com](http://www.books.elsevier.com)

Printed and bound in the United States of America

08 09 10 11 12 5 4 3 2 1

Working together to grow  
libraries in developing countries

[www.elsevier.com](http://www.elsevier.com) | [www.bookaid.org](http://www.bookaid.org) | [www.sabre.org](http://www.sabre.org)

ELSEVIER

BOOK AID  
International

Sabre Foundation

# Contents

<b>Preface</b>	<b>xiii</b>
<b>1 Introduction</b>	<b>1</b>
1.1 Networking as Resource Allocation	1
1.2 A Taxonomy of Current Practice	3
1.3 Technical Elements	9
1.4 Summary and Our Way Forward	12
<b>2 Wireless Communication: Concepts, Techniques, Models</b>	<b>15</b>
2.1 Digital Communication over Radio Channels	16
2.1.1 Simple Binary Modulation and Detection	17
2.1.2 Getting Higher Bit Rates	20
2.1.3 Channel Coding	23
2.1.4 Delay, Path Loss, Shadowing, and Fading	25
2.2 Channel Capacity	32
2.2.1 Channel Capacity without Fading	32
2.2.2 Channel Capacity with Fading	35
2.3 Diversity and Parallel Channels: MIMO	36
2.4 Wideband Systems	42
2.4.1 CDMA	42
2.4.2 OFDMA	45
2.5 Additional Reading	48
<b>3 Application Models and Performance Issues</b>	<b>53</b>
3.1 Network Architectures and Application Scenarios	54
3.2 Types of Traffic and QoS Requirements	56
3.3 Real-Time Stream Sessions: Delay Guarantees	60
3.3.1 CBR Speech	60
3.3.2 VBR Speech	61
3.3.3 Speech Playout	63

3.3.4	QoS Objectives	65
3.3.5	Network Service Models	67
3.4	Elastic Transfers: Feedback Control	67
3.4.1	Dynamic Control of Bandwidth Sharing	69
3.4.2	Control Mechanisms: MAC and TCP	70
3.4.3	TCP Performance over Wireless Links	72
3.5	Notes on the Literature	78
<b>4</b>	<b>Cellular FDM-TDMA</b>	<b>81</b>
4.1	Principles of FDM-TDMA Cellular Systems	81
4.2	SIR Analysis: Keeping Cochannel Cells Apart	86
4.3	Channel Reuse Analysis: Hexagonal Cell Layout	92
4.3.1	Cochannel Cell Groups	93
4.3.2	Calculating $N_{reuse}$	94
4.3.3	$\frac{D}{R}$ Ratio: Simple Analysis, Cell Sectorization	96
4.4	Spectrum Efficiency	99
4.5	Channel Allocation and Multicell Erlang Models	101
4.5.1	Reuse Constraint Graph	101
4.5.2	Feasible Carrier Requirements	103
4.5.3	Carrier Allocation Strategies	103
4.5.4	Call Blocking Analysis	104
4.5.5	Comparison of FCA and MPA	106
4.6	Handovers: Techniques, Models, Analysis	112
4.6.1	Analysis of Signal Strength Based Handovers	112
4.6.2	Handover Blocking, Call Dropping: Channel Reservation	115
4.7	The GSM System for Mobile Telephony	117
4.8	Notes on the Literature	119
<b>5</b>	<b>Cellular CDMA</b>	<b>125</b>
5.1	The Uplink SINR Inequalities	126
5.2	A Simple Case: One Call Class	130
5.2.1	Example: Two BSs and Collocated MSs	130
5.2.2	Multiple BSs and Uniformly Distributed MSs	131
5.2.3	Other Cell Interference: Hard and Soft Handover	134
5.2.4	System Capacity for Voice Calls	139
5.3	Admission Control of Multiclass Calls	140
5.3.1	Hard and Soft Admission Control	141
5.3.2	Soft Admission Control Using Chernoff's Bound	141
5.4	Association and Power Control for Guaranteed QoS Calls	145

<b>Contents</b>	<b>ix</b>
5.5 Scheduling Elastic Transfers	149
5.6 CDMA-Based 2G and 3G Cellular Systems	154
5.7 Notes on the Literature	155
5.8 Appendix: Perron-Frobenius Theory	156
<b>6 Cellular OFDMA-TDMA</b>	<b>161</b>
6.1 The General Model	162
6.2 Resource Allocation over a Single Carrier	163
6.2.1 Power Control for Optimal Service Rate	165
6.2.2 Power Control for Optimal Power Constrained Delay	171
6.3 Multicarrier Resource Allocation: Downlink	178
6.3.1 Single MS Case	178
6.3.2 Multiple MSs	181
6.4 WiMAX: The IEEE 802.16 Broadband Wireless Access Standard	183
6.5 Notes on the Literature	183
<b>7 Random Access and Wireless LANs</b>	<b>187</b>
7.1 Preliminaries	188
7.2 Random Access: From Aloha to CSMA	189
7.2.1 Protocols without Carrier Sensing: Aloha and Slotted Aloha	190
7.2.2 Carrier Sensing Protocols	199
7.3 CSMA/CA and WLAN Protocols	201
7.3.1 Principles of Collision Avoidance	201
7.3.2 The IEEE 802.11 WLAN Standards	204
7.3.3 HIPERLAN	211
7.4 Saturation Throughput of a Colocated IEEE 802.11-DCF Network	213
7.5 Service Differentiation and IEEE 802.11e WLANs	222
7.6 Data and Voice Sessions over 802.11	225
7.6.1 Data over WLAN	226
7.6.2 Voice over WLAN	230
7.7 Association in IEEE 802.11 WLANs	234
7.8 Notes on the Literature	235
<b>8 Mesh Networks: Optimal Routing and Scheduling</b>	<b>243</b>
8.1 Network Topology and Link Activation Constraints	244
8.1.1 Link Activation Constraints	244
8.2 Link Scheduling and Schedulable Region	247
8.2.1 Stability of Queues	250
8.2.2 Link Flows and Link Stability Region	254

8.3	Routing and Scheduling a Given Flow Vector	257
8.4	Maximum Weight Scheduling	264
8.5	Routing and Scheduling for Elastic Traffic	273
8.5.1	Fair Allocation for Single Hop Flows	277
8.5.2	Fair Allocation for Multihop Flows	280
8.6	Notes on the Literature	287
9	Mesh Networks: Fundamental Limits	291
9.1	Preliminaries	292
9.1.1	Random Graph Models for Wireless Networks	293
9.1.2	Spatial Reuse, Network Capacity, and Connectivity	296
9.2	Connectivity in the Random Geometric Graph Model	297
9.2.1	Finite Networks in One Dimension	298
9.2.2	Networks in Two Dimensions: Asymptotic Results	302
9.3	Connectivity in the Interference Model	309
9.4	Capacity and Spatial Reuse Models	315
9.5	Transport Capacity of Arbitrary Networks	318
9.6	Transport Capacity of Randomly Deployed Networks	322
9.6.1	Protocol Model	322
9.6.2	Discussion	331
9.7	Notes on the Literature	333
10	Ad Hoc Wireless Sensor Networks (WSNs)	337
10.1	Communication Coverage	339
10.2	Sensing Coverage	341
10.3	Localization	348
10.4	Routing	353
10.5	Function Computation	359
10.6	Scheduling	368
10.6.1	S-MAC	369
10.6.2	IEEE 802.15.4 (Zigbee)	370
10.7	Notes on the Literature	372
	<b>Appendices</b>	<b>375</b>
A	Notation and Terminology	377
A.1	Miscellaneous Operators and Mathematical Notation	377
A.2	Vectors and Matrices	377
A.3	Asymptotics: The $\mathcal{O}$ , $\sigma$ , and $\sim$ Notation	377
A.4	Probability	379

<b>Contents</b>	<b>xi</b>
<b>B A Review of Some Mathematical Concepts</b>	<b>381</b>
<b>B.1 Limits of Real Number Sequences</b>	<b>381</b>
<b>B.2 A Fixed Point Theorem</b>	<b>382</b>
<b>B.3 Probability and Random Processes</b>	<b>382</b>
<b>B.3.1 Useful Inequalities and Bounds</b>	<b>382</b>
<b>B.3.2 Convergence Concepts</b>	<b>384</b>
<b>B.3.3 The Borel-Cantelli Lemma</b>	<b>385</b>
<b>B.3.4 Laws of Large Numbers and Central Limit Theorem</b>	<b>385</b>
<b>B.3.5 Stationarity and Ergodicity</b>	<b>386</b>
<b>B.4 Notes on the Literature</b>	<b>387</b>
<b>C Convex Optimization</b>	<b>389</b>
<b>C.1 Convexity</b>	<b>389</b>
<b>C.2 Local and Global Optima</b>	<b>389</b>
<b>C.3 The Karush-Kuhn-Tucker Conditions</b>	<b>390</b>
<b>C.4 Duality</b>	<b>391</b>
<b>D Discrete Event Random Processes</b>	<b>393</b>
<b>D.1 Stability Analysis of Discrete Time Markov Chains (DTMCs)</b>	<b>393</b>
<b>D.2 Continuous Time Markov Chains</b>	<b>394</b>
<b>D.3 Renewal Processes</b>	<b>398</b>
<b>D.3.1 Renewal Reward Processes</b>	<b>398</b>
<b>D.3.2 The Excess Distribution</b>	<b>399</b>
<b>D.3.3 Markov Renewal Processes</b>	<b>399</b>
<b>D.4 Some Topics in Queuing Theory</b>	<b>401</b>
<b>D.4.1 Little's Theorem</b>	<b>401</b>
<b>D.4.2 Poisson Arrivals See Time Averages (PASTA)</b>	<b>402</b>
<b>D.5 Some Important Queuing Models</b>	<b>403</b>
<b>D.5.1 The M/G/c/c Queue</b>	<b>403</b>
<b>D.5.2 The Processor Sharing Queue</b>	<b>404</b>
<b>D.6 Notes on the Literature</b>	<b>405</b>
<b>Bibliography</b>	<b>407</b>
<b>Index</b>	<b>417</b>



# Preface

## **Another Book on Wireless Networking?**

The availability of high performance, low power, and low cost digital signal processors, and advances in digital communication techniques over the radio frequency spectrum have resulted in the widespread availability of wireless network technology for mass consumption. Several excellent books are now available that deal with the area of wireless communications, where topics of recent interest include multiple-input-multiple-output (MIMO) systems, space time coding, orthogonal frequency division multiplexing (OFDM), and multiuser detection. Wireless networks are best known in the context of first- and second-generation mobile telephony (AT&T's analog AMPS system in the first generation, and the GSM and CDMA digital systems in the second generation). There are books that provide coverage of such wireless networks, and also those that combine a comprehensive treatment of physical layer wireless communication with that of cellular networks.

In the last decade, however, there has been an explosion in the development and deployment of new wireless network technologies, and in the conceptualization of, and research in, a variety of newer ones. From the ubiquitous WiFi coffee shop and airport networks to the emerging WiMAX systems, which promise broadband wireless access to mobile users, the menu of wireless access networks promises to become so comprehensive that wired access from user devices may soon become a relic of the past. Research on wireless mesh networks (so-called ad hoc wireless networks), which started in the 1970s, is being pursued with renewed vigor due to the availability of inexpensive and interoperable mobile wireless devices. In addition, the widespread use of wireless sensor networks (in conjunction with emerging standards such as Zigbee and IEEE 802.15.4) is a clear and present possibility. Thus the variety and scale of wireless networks is unprecedented, and, in teaching courses in our institutions, we have felt the need for a comprehensive analytical treatment of wireless networking, keeping in mind the technical developments in the past, the present, and the future. This book is the outcome of our efforts to address this need.

The foremost aspect of networking, wireline or wireless, is the design of efficient protocols that work. Taking the view that the devil is in the detail, protocols with “working code” often gain widespread acceptance. With the increasing variety in networks and applications, and also in their scale, complex interactions (e.g., between devices using a particular protocol, or between protocols at the various layers) need to be understood. Although computer

simulation is a useful vehicle for understanding the performance of protocols, it is not always sufficient, because, once again, the devil is in the detail. The assumptions made in deriving simulation models play an important role in the results that are obtained. If a simulation program simply encodes the standard, then running the simulation only provides a plethora of numbers, with no new insights being gained. Further, large simulation models, although possibly closer to reality, take a lot of effort to develop and debug, and are slow to execute, thus rendering them not very useful in the early stages of experimentation with algorithms. This is where analytical models become very important. First, the process of deriving such models from the standards, or from system descriptions, provides very useful insights. Second, the analytical models can be used to help verify large simulation programs, by providing exact results for subcases of the model being simulated. Third, research in analytical modeling is necessary to develop models that can be programmed into simulators, so as to increase simulation speed. Finally, the analytical approach is very important for the development of new and efficient protocols, and there is a trend toward optimization via reverse engineering of well-accepted protocols.

In addition to the variety of networks and protocols that need to be understood, there is a large body of fundamental results on wireless networks that have been developed over the last fifteen years that give important insights into optimal design and the limits of performance. Examples of such results include distributed power control in CDMA networks, optimal scheduling in wireless networks (with a variety of optimization objectives involving issues such as network stability, performance, revenue, and fairness), transmission range thresholds for connectivity in a wireless mesh network, and the transport capacity of these networks. Further, the imminence of sensor networks has generated a large class of fundamental problems in the areas of stochastic networks and distributed algorithms that are intrinsically important and interesting.

This book aims (1) to provide an analytical perspective on the design and analysis of the traditional and emerging wireless networks, and (2) to discuss the nature of, and solution methods to, the fundamental problems in wireless networking. For the sake of completeness, traditional voice telephony over GSM and CDMA wireless access networks also is covered. The approach is via various resource allocation models that are based on simple models of the underlying physical wireless communication.

### **About the Book and the Viewpoint**

After the specification of the protocols and the verification of their correctness, we believe that networking is about resource allocation. In wireless networks, the resources are typically spectrum, time, and power. That theme pervades much of this book in our quest for models for performance analysis, for developing design insights, and also for exploring the fundamental limits. Once a problem has been analytically formulated, we draw upon a wide variety of techniques

to analyze it. In this process we will use techniques drawn from, among others, probability theory, stochastic processes, constrained optimization and duality, and graph theory. We believe it is necessary to make forays into these areas in order to bring their power to bear on the problem at hand. However, we have attempted to make the book as self-contained as possible. Wherever possible, we have used only elementary concepts taught in basic courses in engineering mathematics. A brief overview of most of the advanced mathematical material that we use is provided in the appendix. Also, wherever possible we have avoided the theorem–proof approach. Instead, we have developed the theorems or results and then formally stated them.

After the introductory chapter, we begin the presentation of the main material of the book in Chapter 2 by giving an overview of the physical layer issues that are so much more important to understand wireless networks than they are for wireline networks. Wireless networks are viewed as being either *access networks* or *mesh networks*. In access networks mobile wireless nodes connect to an infrastructure node, and in mesh networks they form an independent internet and may or may not connect to an infrastructure network. Access networks are covered in Chapters 4 through 7 and mesh networks are covered in Chapters 8 through 10.

The wireless networking aspect of the book begins in Chapter 3. Like in our earlier book, *Communication Networking: An Analytical Approach*, we precede the discussion on access networks by listing the issues and setting the performance objectives of a wireless network in Chapter 3. FDM-TDMA cellular networks (of which GSM networks are a major example) are discussed in Chapter 4, with the focus on signal-to-interference ratio analysis, on channel allocation, and on the call blocking and call dropping performance. Chapter 5 is on CDMA networks where the main emphasis is on interference management via power allocation. Whereas the traffic model in Chapter 4 and in much of Chapter 5 is an arrival process of calls, each with a rate requirement, in Chapter 6, on OFDMA access networks, we consider buffered models, and discuss power allocation over time and over carriers with the objectives of stability and mean delay. In Chapter 7, we discuss the performance of distributed allocation of channel time in wireless LANs.

We begin our discussion of mesh networks in Chapter 8 by considering optimal routing and scheduling in a given mesh network. One can view this class of problems as the optimal allocation of time and space in a network. In Chapter 9 we explore fundamental limits of this time and space allocation to the flows. Chapter 10 is on the emerging area of sensor networks, a rich field of research issues including connectivity and coverage properties of stochastic networks, and distributed computation.

Some of the material in Chapter 5 and most of the material in Chapters 6 through 10 are being covered in a wireless networking textbook for the first time. We have not obtained new results for the book but we have trawled the literature to pick out the fundamental results and those that are illustrative of the issues

and complexities. Wherever possible, we have simplified the models for pedagogic convenience.

## Using the Book

This is a graduate text, though a final year undergraduate course could be supplemented with material from this text. Some understanding of networking concepts is assumed. A quick introduction may also be obtained from Chapter 2 of our earlier book, *Communication Networking: An Analytical Approach*. Most of the chapters are self-contained and we believe that an instructor can pick and choose the chapters. A course that needs to cover voice and data access networks (including cellular networks and wireless LANs) could be based on Chapters 4 through 7. One can say that these chapters are tied closely to real networks. Chapters 8 through 10 are of a more fundamental and abstract nature. A course with a more current research emphasis could be built around Chapters 6 through 10.

The publisher maintains a website for this book at [www.mkp.com](http://www.mkp.com). We maintain a website for the book at [ece.iisc.ernet.in/~anurag/books](http://ece.iisc.ernet.in/~anurag/books). These websites contain errata, additional problems, PostScript files of the figures used in the book, and other instructional material. An instructor's manual containing solutions to all the exercises and problems and some supplementary problems is also available from the authors.

Arthur Clarke had said that the communications satellite will make inevitable the United Nations of the Earth. Wireless communication and networking are making these United Nations flatter, and possibly more democratic with unbridled opportunities for all. So let's "unwire, cut the cord, and go wireless." And, while we do it, let us step back a bit and understand them from the ground up!

## Acknowledgments

We are grateful to Onkar Dabeer and P.R. Kumar who reviewed the complete manuscript and provided us invaluable comments and criticisms. Saswati Sarkar was visiting us on her sabbatical when we were writing this book; her insightful comments on several chapters of the book have helped immensely in improving the accuracy of the material. Prasanna Chaporkar, N. Hemachandra, U. Jayakrishnan, Koushik Kar, Biplab Sikdar, Chandramani Kishore Singh, and Rajesh Sundaresan read various chapters of the book at our request. They found many errors and rough edges, and we remain grateful for their time and efforts. Many students helped with reviewing the problems and verifying their solutions; these include Onkar Bharadwaj, Avhishek Chatterjee, Sudeep Kamath, Pallavi Manohar, and K. Premkumar. We would like to thank Chandrika Sridhar, our ever-helpful lab secretary in [network\\_labs@ece.iisc.ernet.in](mailto:network_labs@ece.iisc.ernet.in), who typed parts of an initial draft from the lecture notes of the first author, and also prepared all the problems and solutions, both from handwritten manuscripts.

This book has been developed out of the two-part survey article “A Tutorial Survey of Topics in Wireless Networking,” by Anurag Kumar and D. Manjunath, published in *Sāadhanā*, Indian Academy of Sciences Proceedings in Engineering Sciences, Vol. 32, No. 6, December 2007. We are grateful to the publishers of *Sāadhanā* for permitting us to use several extracts and figures from our survey article.

Parts of an early draft of this book have been used by Ed Knightly (Rice University), and Utpal Mukherji (Indian Institute of Science). We hope that the finished version will meet their expectations for the courses they teach.

Book writing grants have been provided by the Centre for Continuing Education of the Indian Institute of Science to the first author and by the Curriculum Development Program of the Indian Institute of Technology, Bombay, to the second author.

Finally, we are grateful to our families for bearing patiently our absence from the regular call of duty at home, in the evenings, holidays, and weekends during the several months over which this book was developed.

Anurag Kumar  
I.I.Sc., Bangalore

D. Manjunath  
I.I.T., Bombay

Joy Kuri  
I.I.Sc., Bangalore



## CHAPTER 1

# Introduction

The idea of sending information over radio waves (i.e., *wireless communication*) is over a hundred years old. When several devices with radio transceivers share a portion of the radio spectrum to send information to each other, we say that we have a *wireless communication network*, or simply a wireless network.


In this chapter we begin by developing a three-layered view of wireless networks. We delineate the subject matter of this book—that is, wireless networking—as dealing with the problem of resource allocation when several devices share a portion of the RF spectrum allocated to them. Next, we provide a taxonomy of current wireless networks. The material in the book is organized along this taxonomy. Then, in this chapter, we identify the common basic technical elements that underlie any wireless network as being (1) physical wireless communication; (2) neighbor discovery, association, and topology formation; and (3) transmission scheduling.

Finally, we provide an overview of the contents of the remaining nine chapters of the book.

### 1.1 Networking as Resource Allocation

Following our viewpoint in [89] we view wireline and wireless communication networks in terms of the three-layered model shown in Figure 1.1. Networks carry the flows of information between distributed applications such as telephony, teleconferencing, media-sharing, World Wide Web access, e-commerce, and so on. The points at which distributed information applications connect to the generators and absorbers of information flows can be viewed as sources and sinks of traffic (see Figure 1.1). Examples of traffic sources are microphones in telephony devices, video cameras, and data, voice, or video files (stored on a computer disk) that are being transmitted to another location. Examples of traffic sinks are telephony loudspeakers, television monitors, or computer storage devices.

As shown in Figure 1.1, the sources and sinks of information and the distributed applications connect to the communication network via common *information services*. The information services layer comprises all the hardware and software required to facilitate the necessary transport services, and to attach the sources or sinks to the wireless network; for example, voice coding, packet buffering and playout, and voice decoding, for packet telephony; or similar

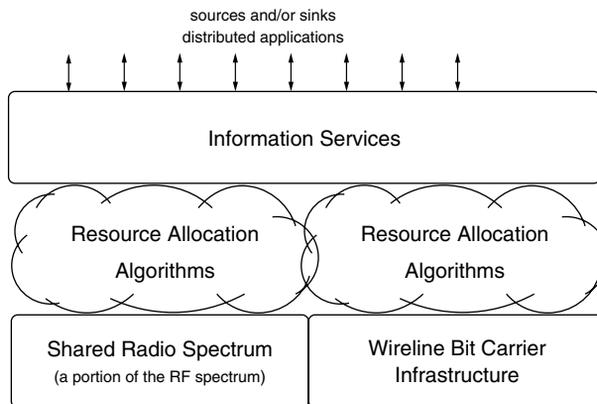

**Figure 1.1 A conceptual view of distributed applications utilizing wireline and wireless networks. Wireless networking is concerned with algorithms for resource allocation between devices sharing a portion of the radio spectrum. On the other hand, in wireline networks the resource allocation algorithms are concerned with sharing the fixed resources of a bit transport infrastructure.**

facilities for video telephony or for streaming video playout; or mail preparation and forwarding software for electronic mail; or a browser for the World Wide Web.

We turn now to the bottom layer in Figure 1.1. In wireline networks the information to be transported between the endpoints of applications is carried over a static bit-carrier infrastructure. These networks typically comprise high-quality digital transmission systems over copper or optical media. Once such links are properly designed and configured, they can be viewed as “bit pipes,” each with a certain bit rate, and usually a very small bit error rate. The bit carrier infrastructure can be dynamically reconfigured on the basis of traffic demands, and such actions are a part of the cloud labeled “resource allocation algorithms” in the figure.

The left side of the bottom layer in Figure 1.1 corresponds to wireless networks. Typically, each wireless network system is constrained to operate in some portion of the RF spectrum. For example, a cellular telephony system may be assigned 5 MHz of spectrum in the 900 MHz band. Information bits are transported between devices in the wireless network by means of some physical wireless communication technique (i.e., a PHY layer technique, in terms of the ISO-OSI model) operating in the portion of the RF spectrum that is assigned to the network. It is well known, however, that unguided RF communication between mobile wireless devices poses challenging problems. Unlike wireline communication, or even point-to-point, high-power microwave links between dish antennas mounted on tall towers, digital wireless communication between mobile devices has to deal with a variety of time-varying channel impairments


such as obstructions by steel and concrete buildings, absorption in partition walls or in foliage, and interference between copies of a signal that traverse multiple paths. In order to combat these problems, it is imperative that in a mobile or ad hoc wireless network the PHY layer should be adaptable. In fact, in some systems multiple modulation schemes are available, and each of these may have variable parameters such as the error control codes, and the transmitter powers. Hence, unlike a wired communication network, where we can view networking as being concerned with the problems of resource sharing over a static bit carrier infrastructure, in wireless networking, the resource allocation mechanisms would include these adaptations of the PHY layer. Thus, in Figure 1.1 we have actually “absorbed” the physical wireless communication mechanisms into the resource allocation layer. Hence, we can define our view of *wireless networking* as being concerned with all the mechanisms, procedures, or algorithms for efficient sharing of a portion of the radio spectrum so that all the instances of communication between the various devices obtain their desired *quality of service (QoS)*.

## 1.2 A Taxonomy of Current Practice


In this book, instead of pursuing an abstract, technology agnostic approach, we will develop an understanding of the various wireless networking techniques in the context of certain classes of wireless networks as they exist today. Thus we begin our treatment by taking a look at a taxonomy of the current practice of wireless networks. Figure 1.2 provides such a taxonomy. Several commonly used terms of the technology will arise as we discuss this taxonomy. These will be highlighted by the *italic* font, and their meanings will be clear from the context. Of course, the attendant engineering issues will be dealt with at length in the remainder of the book.

Fixed wireless networks include line-of-sight microwave links, which until recently were very popular for long distance transmission. Such networks basically comprise point-to-point line-of-sight digital radio links. When such links are set up, with properly aligned high gain antennas on tall masts, the links can be viewed as point-to-point bit pipes, albeit with a higher bit error rate than wired links. Thus in such fixed wireless networks no essentially new issues arise than in a network of wired links.

On the other hand the second and third categories shown in the first level of the taxonomy (i.e., access networks and ad hoc networks) involve *multiple access* where, in the same geographical region, several devices share a radio spectrum to communicate among themselves (see Figure 1.3). Currently, the most important role of wireless communications technology is in mobile access to wired networks. We can further classify such access networks into two categories: one in which resource allocation is more or less static (akin to circuit multiplexing), and the other in which the traffic is statistically multiplexed, either in a centralized manner or by distributed mechanisms.

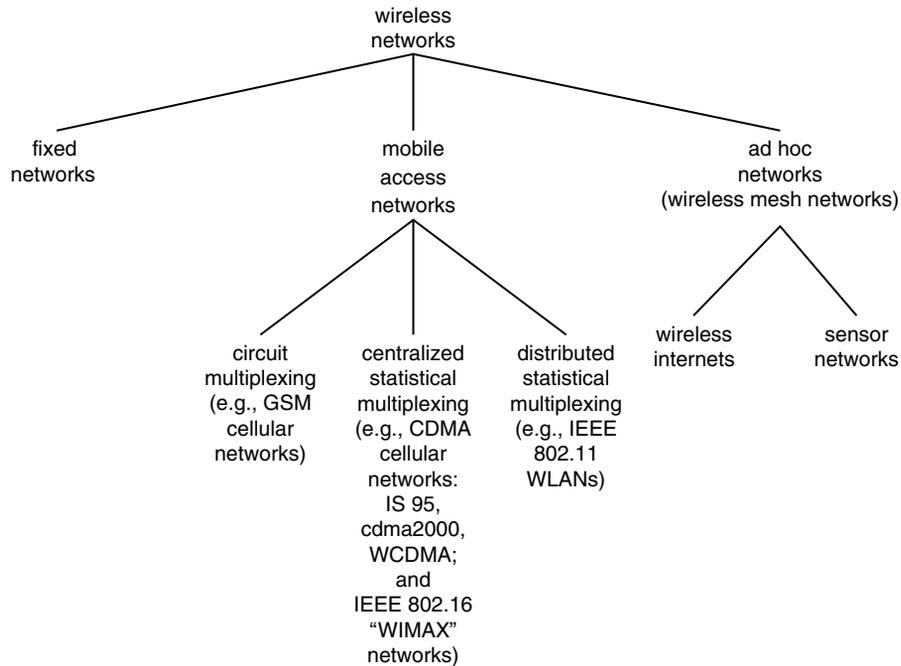

**Figure 1.2 A taxonomy of wireless networks.**

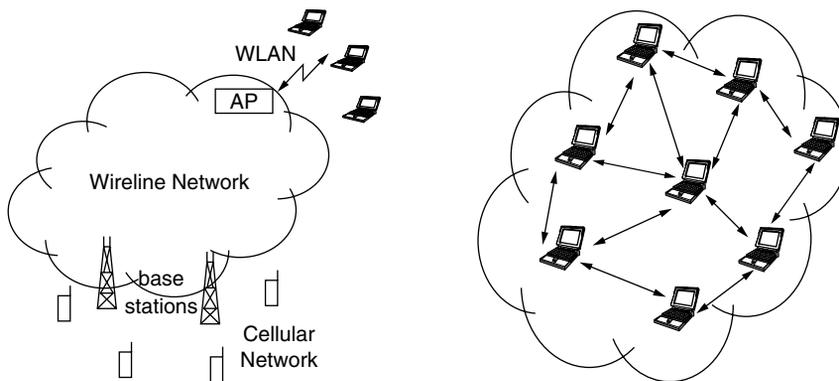

**Figure 1.3 The left panel shows some access networks (a cellular telephony network, and a wireless local area network (WLAN), where the access is via an AP (access point)), and the right panel shows a mesh wireless network of portable computers.**

Cellular wireless networks were introduced in the early 1980s as a technology for providing access to the wired phone network to mobile users. The network coverage area is partitioned into regions (with diameters ranging from hundreds of meters to a few kilometers) called *cells*, hence the term “cellular.” In each cell there is a *base station* (BS), which is connected to the wired network, and through which the mobile devices in the cell communicate over a one hop wireless link. The cellular systems that have the most widespread deployment are the ones that share the available spectrum using *frequency division multiplexed time division multiple access* (FDM-TDMA) technology. Among such systems by far the most commercially successful has been the GSM system, developed by a European consortium. The available spectrum is first partitioned into a contiguous *up-link* band and another contiguous *down-link* band. Each of these bands is statically or dynamically partitioned into reuse subbands, with each cell being allocated such a subband (this is the FDM aspect). The partitioning of the up-link and down-link bands is done in a paired manner so that each cell is actually assigned a pair of subbands. Each subband is further partitioned into channels or carriers (also an FDM aspect), each of which is digitally modulated and then slotted in such a way that a channel can carry up to a fixed number of calls (e.g., 8 calls) in a TDM fashion. Each arriving call request in a cell is then assigned a slot in one of the carriers in that cell; of course, a pair of slots is assigned in paired up-link and down-link channels in that cell. Thus, since each call is assigned dedicated resources, the system is said to be *circuit multiplexed*, just like the wireline phone network. These are *narrowband systems* (i.e., users’ bit streams occupy frequency bands just sufficient to carry them), and the radio links operate at a high signal-to-interference-plus-noise-ratio (SINR), and hence careful *frequency planning* (i.e., partitioning of the spectrum into reuse subbands, and allocation of the subbands to the cells) is needed to avoid *cochannel interference*. The need for allocation of frequency bands over the network coverage area (perhaps even dynamic allocation over a slow timescale), and the grant and release of individual channels as individual calls arrive and complete, requires the control of such systems to be highly centralized. Note that *call admission control*, that is, call blocking, is a natural requirement in an FDM-TDMA system, since the resources are partitioned and each connection is assigned one resource unit.

Another cellular technology that has developed over the past 10 to 15 years is the one based on *code division multiple access* (CDMA). In these networks, the entire available spectrum is reused in every cell. These are *broadband* systems, which means that each user’s bit stream (a few kilobits per second) occupies the entire available radio spectrum (a few megahertz). This is done by *spreading* each user’s signal over the entire spectrum by multiplying it by a *pseudorandom sequence*, which is allocated to the user. This makes each user’s signal appear like noise to other users. The knowledge of the spreading sequences permits the receivers to separate the users’ signals, by means of *correlation receivers*. Although no frequency planning is required for CDMA systems, the performance is *interference limited* as every transmitted signal is potentially an interferer for

every other signal. Thus at any point of time there is an allocation of powers to all the transmitters sharing the spectrum, such that their desired receivers can decode their transmissions, in the presence of all the cross interferences. These desired power levels need to be set depending on the locations of the users, and the consequent channel conditions between the users and the base stations, and need to be dynamically controlled as users move about and channel conditions change. Hence tight control of transmitter power levels is necessary. Further, of course, the allocation of spreading codes, and management of movement between cells needs to be done. We note that, unlike the FDM-TDMA system described earlier, there is no dedicated allocation of resources (frequency and time-slot) to each call. Indeed, during periods when a call is inactive no radio resources are utilized, and the interference to other calls is reduced. Thus, we can say that the traffic is *statistically multiplexed*. If there are several calls in the system, each needing certain *quality of service (QoS)* (bit rate, maximum bit error rate), then the number of calls in the system needs to be controlled so that the probability of QoS violation of the calls is kept small. This requires call admission control, which is an essential mechanism in CDMA systems, in order that QoS objectives can be achieved. Evidently, these are all centrally coordinated activities, and hence even CDMA cellular systems depend on central intelligence that resides in the *base station controllers* (BSCs).

Until recently, cellular networks were driven primarily by the needs of circuit multiplexed voice telephony; on demand, a mobile phone user is provided a wireless digital communication channel on which is carried compressed telephone quality (though not “toll” quality) speech. Earlier, we have described two technologies for *second generation (2G)* cellular wireless telephony. Recently, with the growing need for mobile Internet access, there have been efforts to provide packetized data access on these networks as well. In the FDM-TDMA systems, low bit rate data can be carried on the digital channel assigned to a user. As is always the case in circuit multiplexed networks, flexibility in the allocation of bandwidth is limited to assigning multiple channels to each user. Such an approach is followed in the GSM-GPRS (General Packet Radio Service) system, where, by combining multiple TDM slots on an FDM carrier, shared packet switched access is provided to mobile users. A further evolution is the EDGE (Enhanced Data rates for GSM Evolution) system, where, in addition to combining TDM slots, higher order modulation schemes, with adaptive modulation, are utilized to obtain shared packet switched links with speeds up to 474 Kbps. These two systems often are viewed, respectively, as 2.5G and 2.75G evolutions of the GSM system. These are data evolutions of an intrinsically circuit switched system that was developed for mobile telephony. On the other hand there is considerable flexibility in CDMA systems where there is no dedicated allocation of resources (spectrum or power). In fact, both voice and data can be carried in the packet mode, with the user bit rate, the amount of spreading, and the allocated power changing on a packet-by-packet basis. This is the approach taken for the *third generation (3G)* cellular systems, which are based entirely on CDMA technology, and are meant to carry *multimedia traffic* (i.e., store and forward data, packetized telephony, interactive

video, and streaming video). The most widely adopted standard for 3G systems is WCDMA (wideband CDMA), which was created by the 3G Partnership Project (3GPP), a consortium of standardization organizations from the United States, Europe, China, Japan, and Korea.

Cellular networks were developed with the primary objective of providing wireless access for mobile users. With the growth of the Internet as the de facto network for information dissemination, access to the Internet has become an increasingly important requirement in most countries. In large congested cities, and in developing countries without a good wireline infrastructure, *fixed wireless access* to the Internet is seen as a significant market. It is with such an application in mind that the IEEE 802.16 standards were developed, and are known in the industry as WiMAX. The major technical advance in WiMAX is in the adoption of several high performance physical layer (PHY) technologies to provide several tens of Mbps between a base station (BS) and fixed subscriber stations (SS) over distances of several kilometers. The PHY technologies that have been utilized are *orthogonal frequency division multiple access (OFDMA)* and multiple antennas at the transmitters and the receivers. The latter are commonly referred to as *MIMO (multiple-input-multiple-output)* systems. In an OFDMA system, several subchannels are statically defined in the system bandwidth, and these subchannels are digitally modulated. In order to permit up-link and down-link transmissions, time is divided into frames and each frame is further partitioned into an up-link and a down-link part (this is called *time division duplexing (TDD)*). The BS allocates time on the various subchannels to various down-link flows in the down-link part of the frame and, based on SS requests, in the up-link part of the frame. This kind of TDD MAC structure has been used in several earlier systems; for example, satellite networks involving very small aperture satellite terminals (VSATs), and even in wireline systems such as those used for the transmission of digital data over cable television networks. WiMAX specifications now have been extended to include broadband access to mobile users.

We now discuss the third class of networks in the mobile access category in the first level of the taxonomy shown in Figure 1.2—distributed packet scheduling. Cellular networks have emerged from centrally managed point-to-point radio links, but another class of wireless networks has emerged from the idea of *random access*, whose prototypical example is the Aloha network. Spurred by advances in digital communication over radio channels, random access networks can now support bit rates close to desktop wired Ethernet access. Hence random access wireless networks are now rapidly proliferating as the technology of choice for wireless Internet access with limited mobility. The most important standards for such applications are the ones in the IEEE 802.11 series. Networks based on this standard now support physical transmission speeds from a few Mbps (over 100s of meters) up to 100 Mbps (over a few meters). The spectrum is shared in a *statistical TDMA* fashion (as opposed to slotted TDMA, as discussed, earlier, in the context of first generation FDM-TDMA systems). Nodes contend for the channel, and possibly collide. In the event of a collision, the colliding nodes *back*

*off* for independently sampled random time durations, and then reattempt. When a node is able to acquire the channel, it can send at the highest of the standard bit rates that can be decoded, given the channel condition between it and its receiver. This technology is predominantly deployed for creating *wireless local area networks* (WLANs) in campuses and enterprise buildings, thus basically providing a one hop untethered access to a building's Ethernet network. In the latest enhancements to the IEEE 802.11 standards, MIMO-OFDM physical layer technologies are being employed in order to obtain up to 100 Mbps transmission speeds in indoor environments.

With the widespread deployment of IEEE 802.11 WLANs in buildings, and even public spaces (such as shopping malls and airports), an emerging possibility is that of carrying interactive voice and streaming video traffic over these networks. The emerging concept of fourth-generation wireless access networks envisions mobile devices that can support multiple technologies for physical digital radio communication, along with the resource management algorithms that would permit a device to seamlessly move between 3G cellular networks, IEEE 802.16 access networks and IEEE 802.11 WLANs, while supporting a variety of packet mode services, each with its own QoS requirements.

With reference to the taxonomy in Figure 1.2, we now turn to the category labeled “ad hoc networks” or “wireless mesh networks.” Wireless access networks provide mobile devices with one-hop wireless access to a wired network. Thus, in such networks, in the path between two user devices there is only one or at most two wireless links. On the other hand a wireless ad hoc network comprises several devices arbitrarily located in a space (e.g., a line segment, or a two-dimensional field). Each device is equipped with a radio transceiver, all of which typically share the same radio frequency band. In this situation, the problem is to communicate between the various devices. Nodes need to discover neighbors in order to form a topology, good paths need to be found, and then some form of time scheduling of transmissions needs to be employed in order to send packets between the devices. Packets going from one node to another may need to be forwarded by other nodes. Thus, these are *multihop* wireless packet radio networks, and they have been studied as such over several years. Interest in such networks has again been revived in the context of *multihop wireless internets* and *wireless sensor networks*. We discuss these briefly in the following two paragraphs.

In some situations it becomes necessary for several mobile devices (such as portable computers) to organize themselves into a multihop wireless packet network. Such a situation could arise in the aftermath of a major natural disaster such as an earthquake, when emergency management teams need to coordinate their activities and all the wired infrastructure has been damaged. Notice that the kind of communication that such a network would be required to support would be similar to what is carried by regular public networks; that is, point-to-point store and forward traffic such as electronic mails and file transfers, and low bit rate voice and video communication. Thus, we can call such a network a

*multihop wireless internet*. In general, such a network could attach at some point to the wired Internet.

Whereas multihop wireless internets have the service objective of supporting instances of point-to-point communication, an ad hoc wireless sensor network has a global objective. The nodes in such a network are miniature devices, each of which carries a microprocessor (with an energy efficient operating system); one or more sensors (e.g., light, acoustic, or chemical sensors); a low power, low bit rate digital radio transceiver; and a small battery. Each sensor monitors its environment and the objective of the network is to deliver some global information or an inference about the environment to an operator who could be located at the periphery of the network, or could be remotely connected to the sensor network. An example is the deployment of such a network in the border areas of a country to monitor intrusions. Another example is to equip a large building with a sensor network comprising devices with strain sensors in order to monitor the building's structural integrity after an earthquake. Yet another example is the use of such sensor networks in monitoring and control systems such as those for the environment of an office building or hotel, or a large chemical factory.

### 1.3 Technical Elements

In the previous section we provided an overview of the current practice of wireless networks. We organized our presentation around a taxonomy of wireless networks shown in Figure 1.2. Although the technologies that we discussed may appear to be disparate, there are certain common technical elements that constitute these wireless networks. The efficient realization of these elements constitutes the area of wireless networking.

The following is an enumeration and preliminary discussion of the technical elements.

1. *Transport of the users' bits over the shared radio spectrum*. There is, of course, no communication network unless bits can be transported between users. Digital communication over mobile wireless links has evolved rapidly over the past two decades. Several approaches are now available, with various tradeoffs and areas of applicability. Even in a given system, the digital communication mechanisms can be adaptive. First, for a given digital modulation scheme the parameters can be adapted (e.g., the transmit power, or the amount of error protection), and, second, sophisticated physical layers actually permit the modulation itself to be changed even at the packet or burst timescale (e.g., if the channel quality improves during a call then a higher order modulation can be used, thus helping in store and forward applications that can utilize such time varying capacity). This adaptivity is very useful in the mobile access situation where the channels and interference levels are rapidly changing.

2. *Neighbor discovery, association and topology formation, routing.* Except in the case of fixed wireless networks, we typically do not “force” the formation of specific links in a wireless network. For example, in an access network each mobile device could be in the vicinity of more than one BS or *access point* (AP). To simplify our writing, we will refer to a BS or an AP as an access device. It is a nontrivial issue as to which access device a mobile device connects through. First, each mobile needs to determine which access devices are in its vicinity, and through which it can potentially communicate. Then each mobile should associate with an access device such that certain overall communication objectives are satisfied. For example, if a mobile is in the vicinity of two BSs and needs certain quality of service, then its assignment to only a particular one of the two BSs may result in satisfaction of the new requirement, and all the existing ones.

In the case of an access network the problem of routing is trivial; a mobile associates with a BS and all its packets need to be routed through that BS. On the other hand, in an ad hoc network, after the associations are made and a topology is determined, good routes need to be determined. A mobile would have several neighbors in the discovered topology. In order to send a packet to a destination, an appropriate neighbor would need to be chosen, and this neighbor would further need to forward the packet toward the destination. The choice of the route would depend on factors such as the bit rate achievable on the hops of the route, the number of hops on the route, the congestion along the route, and the residual battery energies in devices along the route.

We note that association and topology formation is a procedure whose timescale will depend on how rapidly the relative locations of the network nodes is changing. However, one would typically not expect to associate and reassociate a mobile device, form a new topology, or recalculate routing at the packet timescale.

If mobility is low, for example in wireless LANs and static sensor networks, one could consider each fixed association, topology, and routing, and compute the performance measures at the user level. Note that this step requires a scheduling mechanism, discussed as the next element. Then that association, topology, and routing would be chosen that optimizes, in some sense, the performance measures. In the formulation of such a problem, first we need to identify one or more performance objectives (e.g., the sum of the user utilities for the transfer rates they get). Then we need to specify whether we seek a cooperative optimum (e.g., the network operator might seek the global objective of maximizing revenue) or a noncooperative equilibrium. The latter might model the more practical situation, since users would tend to act selfishly, attempting to maximize their performance while reducing their costs. Finally, whatever the solution of the problem, we need an algorithm (centralized or distributed) to compute it online.